



md3

CHARACTERISTIC | FEATURES | TECHNICAL DATA

MD3 gas dryer was initially designed to be a part of our stationary Sensonic CGM analyser.


Though, thanks to the efficiency, small dimensions, and competitive price, MD3 dryer became interesting alternative and even dedicated solution as a standalone gas conditioner.

Its another strong point - universality, makes it available in three different versions: stationary (hung on the wall), portable for laboratory applications, and now also portable for field applications.

CHARACTERISTIC FEATURES TECHNICAL DATA

- Condensation dryer based on the Peltier element
- Built-in peristaltic pump for condensate removal
- Large surface gas filter (optionally two of them) that provides thorough cleaning of the gas sample and long, maintenance-free intervals
- Md3 gas dryer, not only is it supplied as a part of mammos gas analyser, but also can work as an autonomous device.
- It is available in three versions:
 - Stationary dryer - with power supply unit is provided on a common mounting plate. It's adjusted to be hung on the wall.
 - Portable dryer for laboratory applications - adjusted to set on table and is equipped with uncoupled mains adapter.
 - Portable dryer - compact, lightweight, closed in a robust case. It's adjusted to work with portable devices without their own dryer. It works with different power sources, including battery packs.


MD3 GAS DRYER AS STATIONARY UNIT

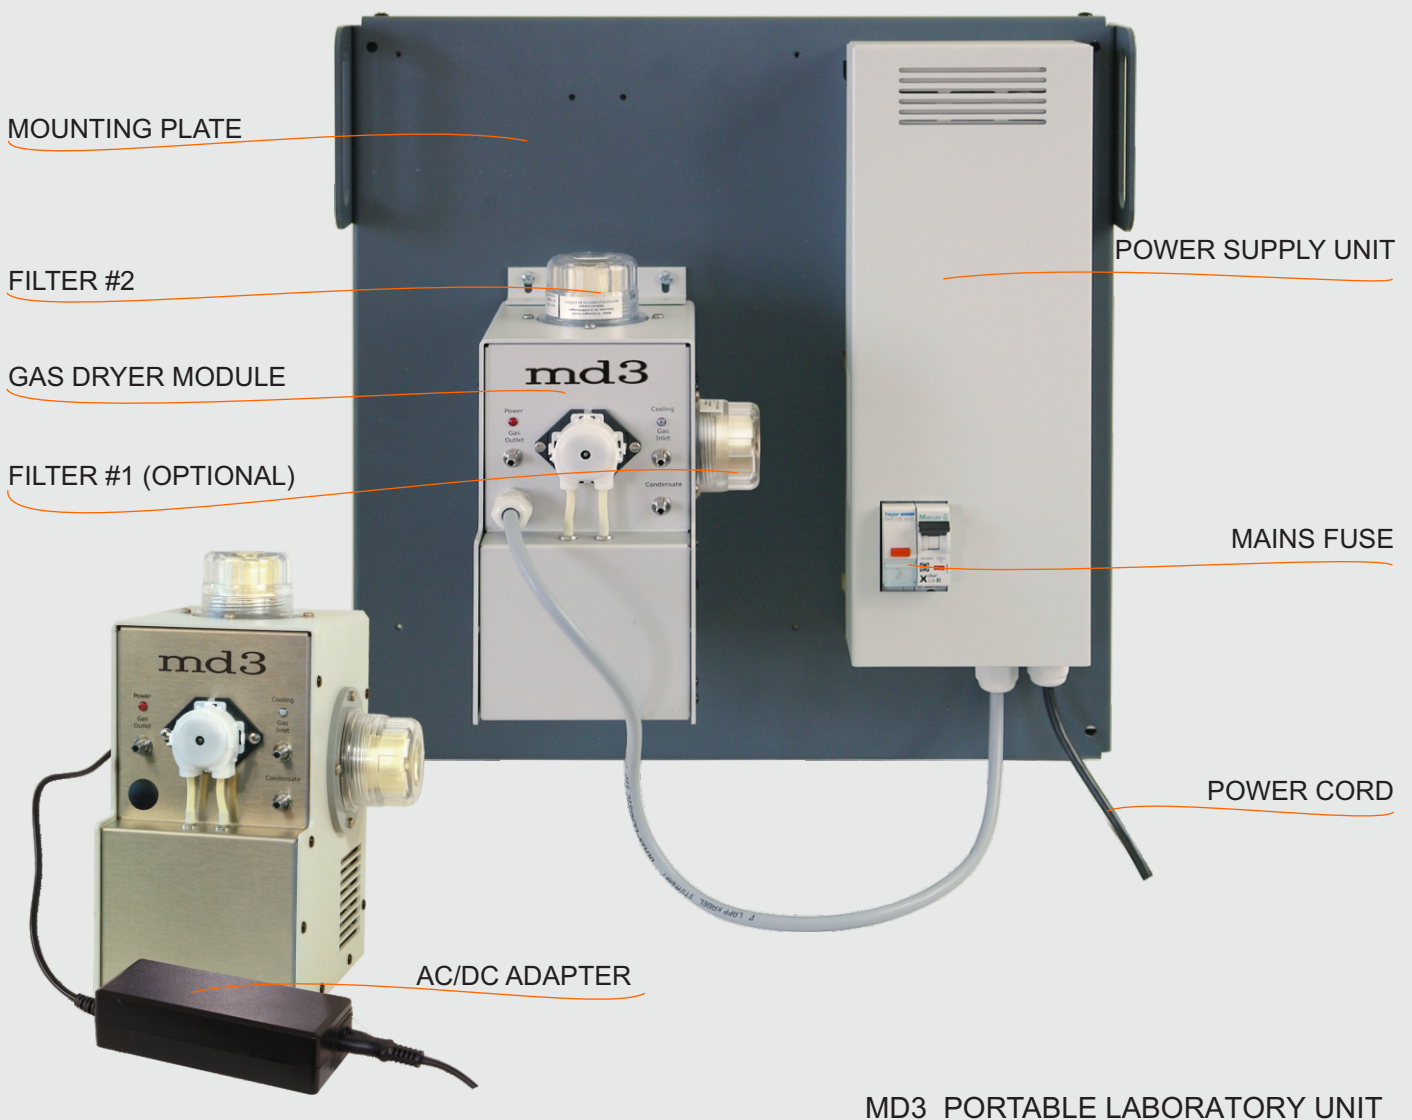

FRONT PANEL



MD3 PORTABLE UNIT

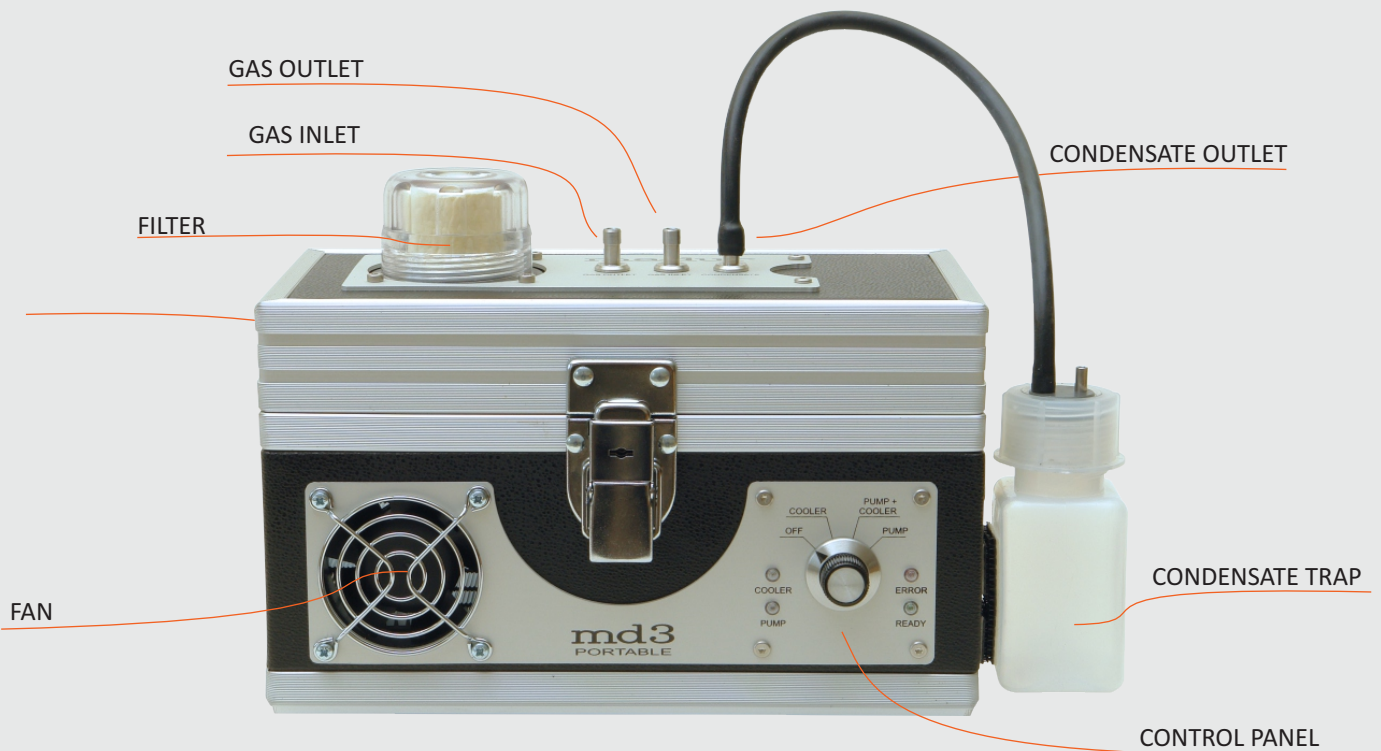

CHARACTERISTIC FEATURES TECHNICAL DATA

MD3 STATIONARY AND LABORATORY DRYERS

Dimensions (W * H * D)	Without filters: 110 mm * 205 mm * 160 mm With filters: 145 mm * 240 mm * 160 mm
Weight	1790 g (single filter version)
Mounting plate: dimensions (H * W) material weight	450 * 439 mm aluminium 1,55kg
Drying method	Water condensation by rapid cooling down
Cooler type	Based on Peltier cooling element with fan (12VDC supply)
Cooling temperature	Constant, about +1°C, output gas dewpoint about +4°C
Ready to operate after	5 minutes
Operating conditions	T: 0°C ÷ 50°C, RH: 5% ÷ 90% (non-condensing)
Storing temperature	0°C ÷ 60°C
Maximum gas flow for efficient drying (at inlet gas temp. 100°C and RH 100%)	10 l/h
Filter insert: length ID OD material pore size	42mm 26mm 32mm glass fibre 2µm
Condensate removal	With built-in peristaltic pump
Peristaltic pump capacity	38 ml/min
Power consumption	30 W

MD3 PORTABLE DRYER

Dimensions (W * H * D)	283 x 168 x 199 mm (max with electric plug connected)
Weight	~2,7 kg
Casing	Wood and stainless steel
Drying method	Water condensation by rapid cooling down
Cooler type	Based on Peltier cooling element with fan (12VDC supply)
Cooling temperature	Constant, about +1°C, output gas dewpoint about +4°C
Ready to operate after	5 minutes
Operating conditions	T: 0°C ÷ 40°C, RH: 5% ÷ 90% (non-condensing)
Storing temperature	0°C ÷ 55°C
Maximum gas flow for efficient drying (at inlet gas temp. 100°C and RH 100%)	10 l/h
Gas filters: quantity material	1 PA - body, PC - cover, viton - sealing
Filter insert: length ID OD material pore size	42mm 26mm 32mm glass fibre 2µm
Condensate removal	With built-in peristaltic pump
Peristaltic pump capacity	38 ml/min
Supply voltage	15÷45 VDC
Electric plug type	NEUTRIK NL2MP
Power consumption	20 W

CHARACTERISTIC	FEATURES	TECHNICAL DATA
----------------	----------	----------------

POWER SUPPLY UNIT - STATIONARY UNIT

Dimensions (W * H * D)	360 mm * 130 mm * 56 mm
Weight (depends on equipment)	1,4kg
Casing material	Aluminum
Mounting plate	Power supply is mounted on common plate with analyser unit
Operating conditions	T: 10°C ÷ 50°C, RH: 5% ÷ 90% (non-condensing)
Storing temperature	0°C ÷ 55°C
Input voltage	100 ÷ 240V AC 50/60Hz
Output voltage	24V DC / 6,3A 150W
Output current	6,3A max
Mains fuse	6A, B type
Cable pass	2 pcs PG-7

MAINS ADAPTER - LABORATORY UNIT

Dimensions (W * H * D)	115 mm * 55 mm * 35 mm
Weight	~300g
Casing material	PC or PPO
Operating conditions	0°C ÷ 40°C
Storing temperature	0°C ÷ 55°C
Input voltage	100 ÷ 240V AC 50/60Hz
Output voltage	+15V DC
Output current	4,33A max
Output plug type	5,5 * 2,1 * 11 mm (positive inner pin)
Output cable length	1,8m
Mains cable socket	IEC C8 (T2)